



U-Sput

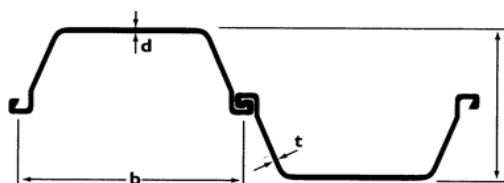

Type	Dimensjoner				Vekt [kg/m]	Vekt [kg/m ²]	Motstands- moment, W_x [cm ³ /m]
	b [mm]	h [mm]	d [mm]	t [mm]			
PU 6	600	226	7,5	6,4	46	76	600
PU 8	600	280	8,0	8,0	55	91	830
PU 12	600	360	9,8	9,0	66	110	1200
PU 16	600	380	12,0	9,0	74	124	1500
PU 20	600	430	12,4	10,0	85	141	2000
PU 25	600	452	14,2	10,0	94	157	2500
PU 32	600	452	19,5	11,0	115	191	3200
Larssen 601	600	310	7,5	6,4	46	77	745
Larssen 602	600	310	8,2	8,0	53	89	830
Larssen 603	600	310	9,7	8,2	65	108	1200
Larssen 604	600	380	10,5	9,0	74	124	1620
Larssen 605	600	420	12,5	9,0	83	139	2020
Larssen 606	600	435	15,6	9,2	94	157	2500
Larssen 607	600	435	21,5	9,8	115	191	3200
Larssen 703	700	400	9,5	9,5	68	97	1210
Larssen 703K	700	400	10,0	10,0	72	103	1300

Z-Sput

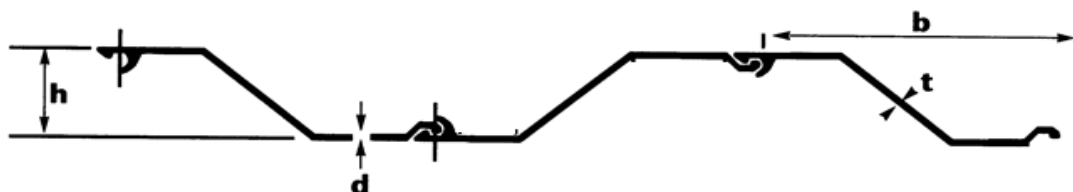

Type	Dimensjoner				Vekt [kg/m]	Vekt [kg/m ²]	Motstands- moment, W_x [cm ³ /m]
	b [mm]	h [mm]	d [mm]	t [mm]			
AZ 13	670	303	9,5	9,5	72	107	1300
AZ 13 10/10	670	304	10,0	10,0	75	112	1350
AZ 18	630	380	9,5	9,5	74	118	1800
AZ 18 10/10	630	381	10,0	10,0	77	123	1870
AZ 26	630	427	13,0	12,2	98	155	2600
AZ 36	630	460	18,0	14,0	122	194	3600
AZ 48	580	482	19,0	15,0	140	241	4800
Hoesch 1200	575	260	9,5	9,5	62	107	1140
Hoesch 1700	575	350	10,0	9,0	67	116	1720
Hoesch 1700 K	575	350	9,5	9,5	67	117	1700
Hoesch 1806	675	380	9,5	9,3	79	118	1800
Hoesch 2500	575	350	12,5	9,5	87	152	2480
Hoesch 2606	675	440	13,2	12,0	101	150	2600
Hoesch 3606	675	485	14,5	12,0	119	177	3600